



Technical Journal

TITLE:

Drive-E: Low oil level message in Driver Information Module (DIM)

REF NO: TJ 31216	ISSUING DEPARTMENT: Technical Service	CAR MARKET: United States and Canada	
PARTNER: 3 US 7510 Volvo Car USA		ISSUE DATE: 2016-04-13	STATUS DATE: 2016-04-21
FUNC GROUP: 2200	FUNC DESC: Lubricating and oil system	Page 1 of 10	

“Right first time in Time”

Attachment

File Name	File Size
TJ 31216.pdf	3.6904 MB

Vehicle Type

Type	Eng	Eng Desc	Sales	Body	Gear	Steer	Model Year	Plant	Chassis range	Struc Week Range
1XX	26						2015-2016		0000001-9999999	201346-201604
1XX	40						2015-2016		0000001-9999999	201346-201604

CSC Customer Symptom Codes

Code	Description
AZ	Lubrication and oil system/Excessive oil consumption
BU	Lubrication and oil system/Incorrect fluid level
7G	Text window and warning symbol/Yellow symbol and text message
EA	Text window and warning symbol/Red symbol and text message

VST Operation Number

VST Operation Number	Description
98623-2	Pistons replace acc. to TJ31216



DTC Diagnostic Trouble Codes

Text

DESCRIPTION:

If an engine still has a high level of oil consumption despite following TJ30087, follow the actions described under **SERVICE**.

SERVICE:

From engine serial number: 1501327, engines have been modified from engine factory.

For service: Change to new pistons + piston rings according the attached service method.

VEHICLE REPORT:

Yes, please submit a Vehicle Report if the service solution described in this TJ has no effect. Use concern area "Vehicle Report" and sub concern area "Support not needed", use function group 2200.

To view TJ attachment continue to next page. This TJ has one attachment.



Volvo Car Customer Service

TJ-31216

Title	Piston	Page	1 (8)
Action	Replacement	Operation number:	98623-2

Issue	Date	Reason
1	2016-02	First issue

Affected vehicles

Model year	Model	Engine
2015, 2016	S60 (11-)	B4204T11, T12
2016	S60 Inscription	B4204T11
2015, 2016	S80 (07-)	B4204T11, T12
2015, 2016	V60	B4204T11, T12
2015, 2016	XC60	B4204T11, T12

Materials

Materials	Qty.	Part No.	Notes
Engine oil	5.9 Liters		
Piston kit	4.0	31493184	B4204T11, T12


Special tools

Description	Part No.
Holder (remov.piston/connecting rod) B 200-B 6304	999 5746

Equipment

Designation	Part No.
Piston ring pliers	
Piston ring compressor	

Removal

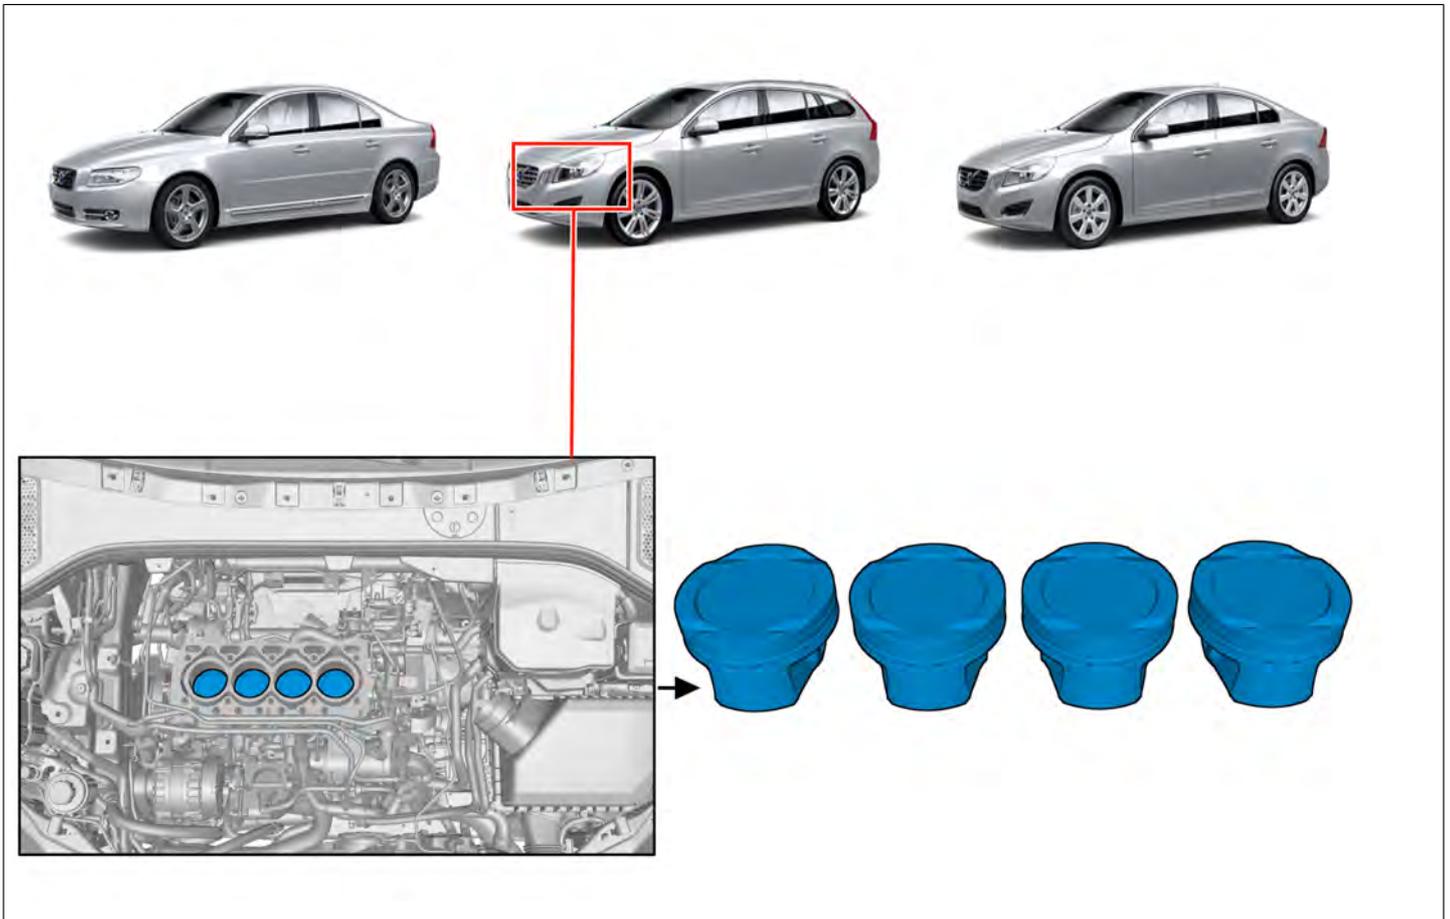

Color symbols


		
		
		

Note! This colour chart displays (in colour print and electronic version) the importance of the different colours used in the images of the method steps.


- 1 . Used for focused component, the component with which you will do something.
- 2 . Used as extra colors when you need to show or differentiate additional parts.
- 3 . Used for attachments that are to be removed/installed. May be screws, clips, connectors, etc.
- 4 . Used when the component is not fully removed from the vehicle but only hung to the side.
- 5 . Used for standard tools and special tools.
- 6 . Used as background color for vehicle components.

Remove the cylinder head , refer to:
Removal, replacement and installation
2 - Engine with mountings and equipment
21 - Engine
211 - cylinder head

Remove balance shaft unit , refer to:
Removal, replacement and installation
2 - Engine with mountings and equipment
21 - Engine
215 - transmission

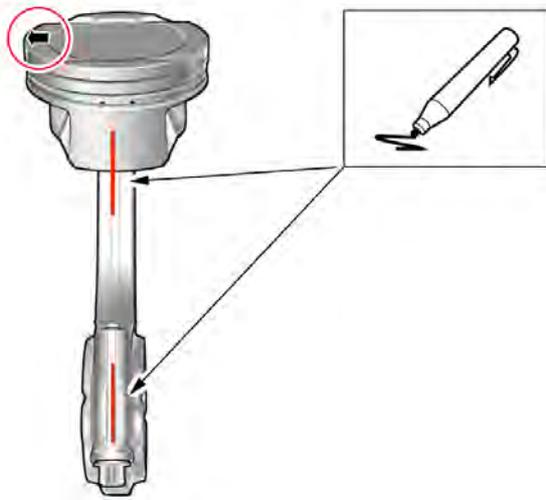


Caution! Note the position of the component before removal.

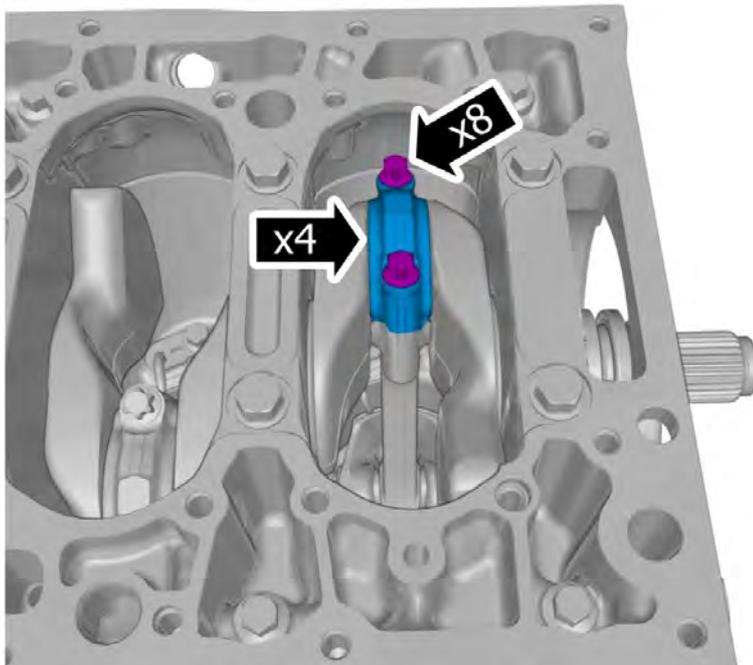

Caution! Take extra care when handling the components.


Remove the screws.
Remove the marked part.

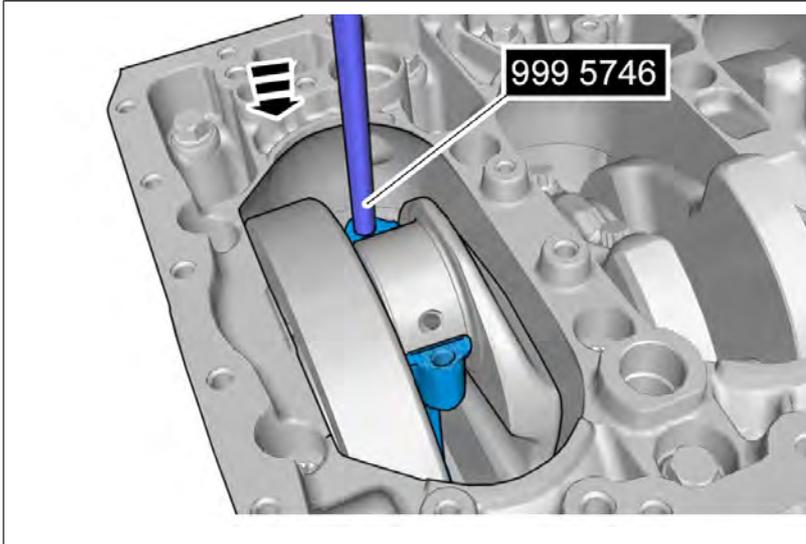


Caution! Take extra care when handling the components.


Special Tool: T9995746, Holder (remov.piston/ connecting rod) B 200-B 6304

Remove the marked part.

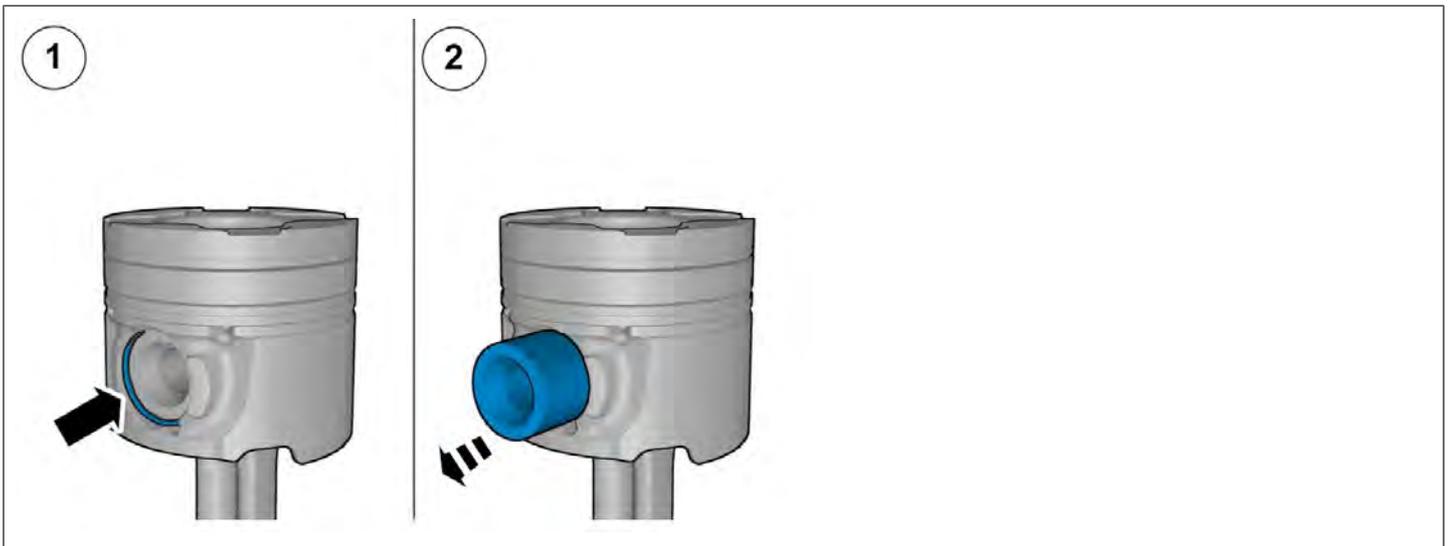

Installation

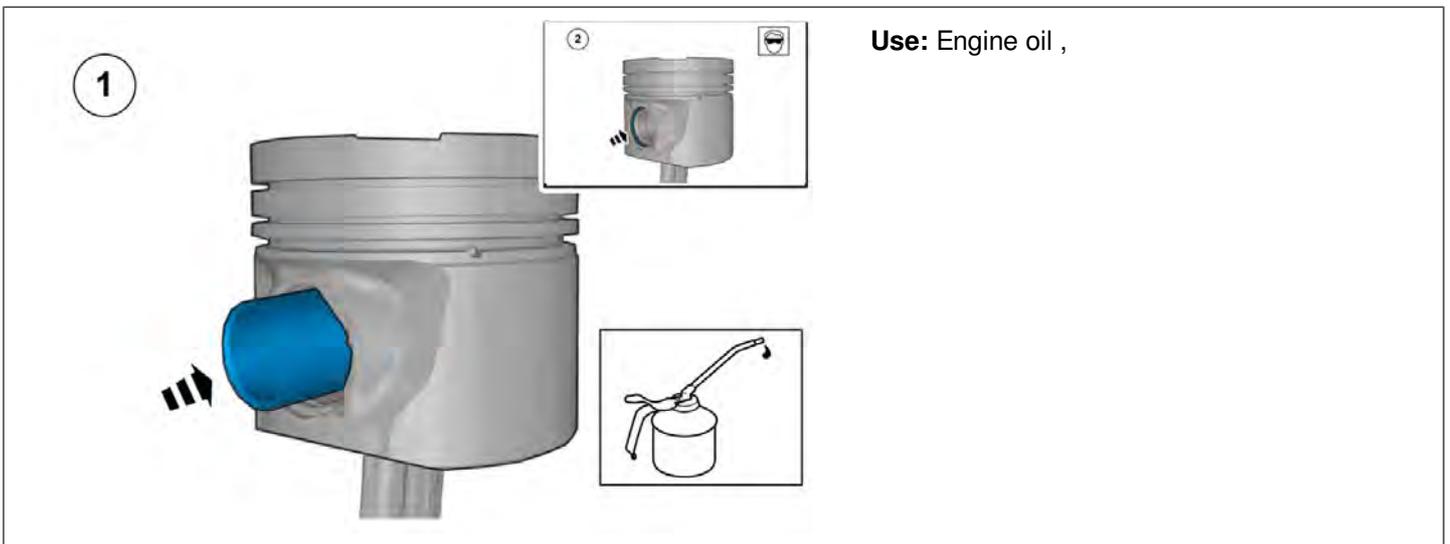


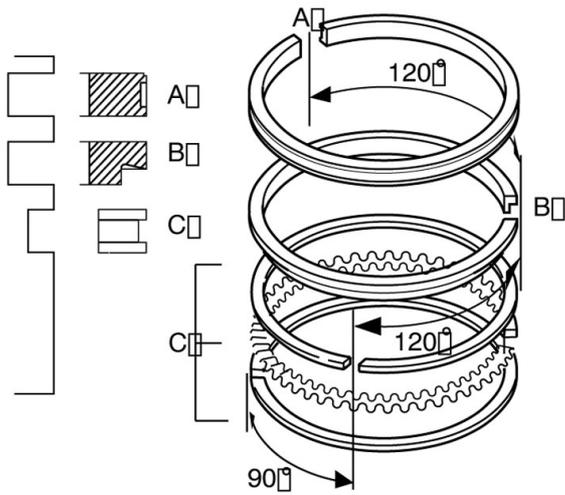


Caution! Make sure that the piston rings can be easily rotated by hand in the piston ring grooves.

Note! Text or marking on piston ring A must be face up.

Note! The piston rings must not be expanded more than necessary.



Use: Piston ring pliers

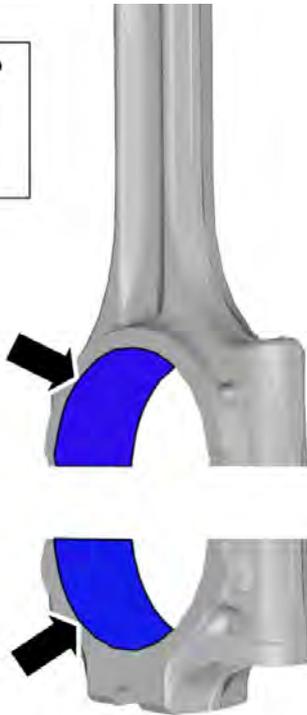

Warning! Make sure that the component is positioned correctly.

Caution! Make sure that the mating faces are clean and free of foreign material.


Use: Engine oil ,

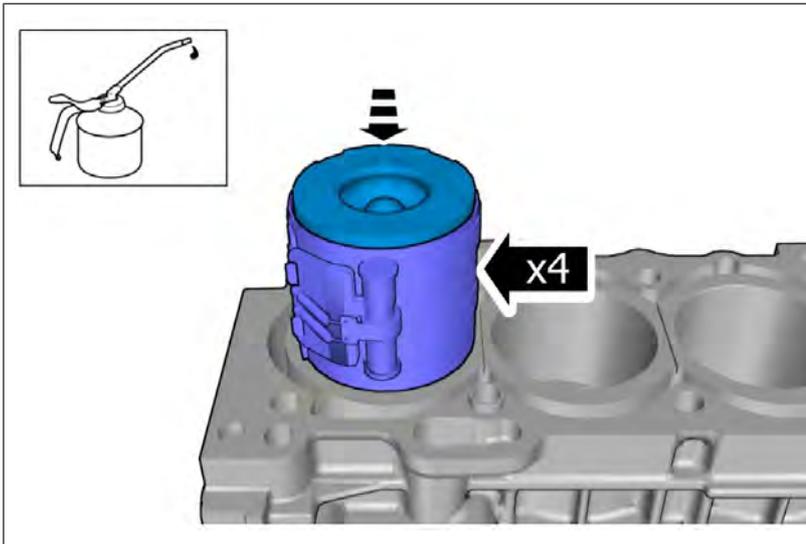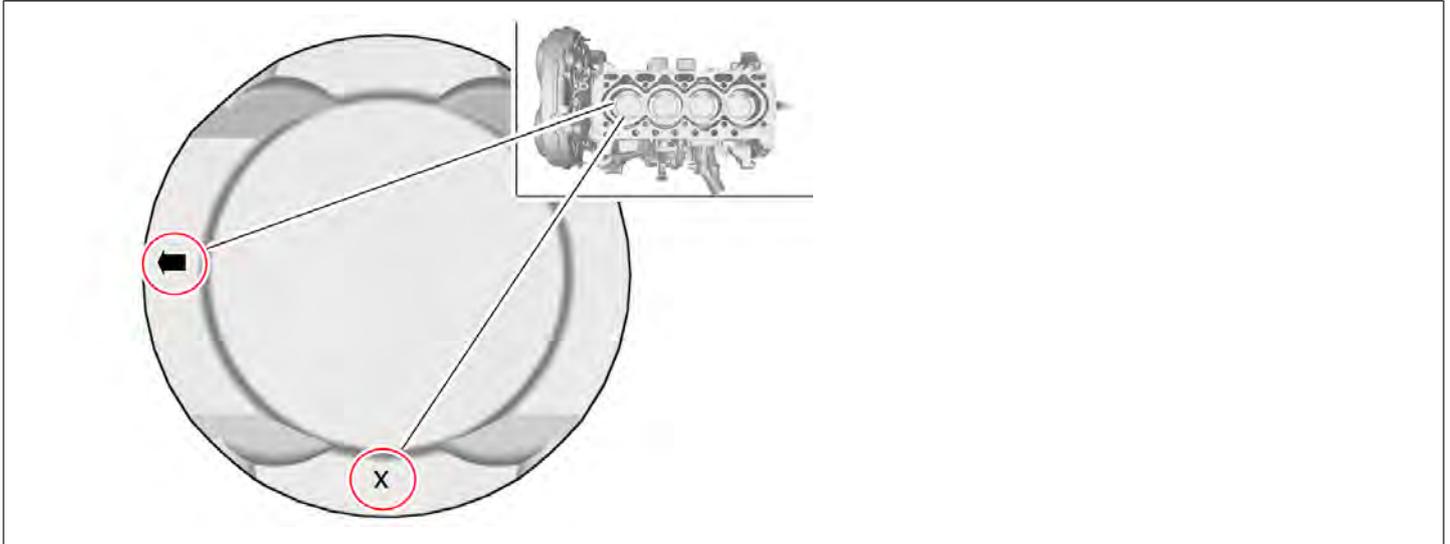

Caution! Take extra care when handling the components.


Use: Engine oil ,

Use: Piston ring compressor

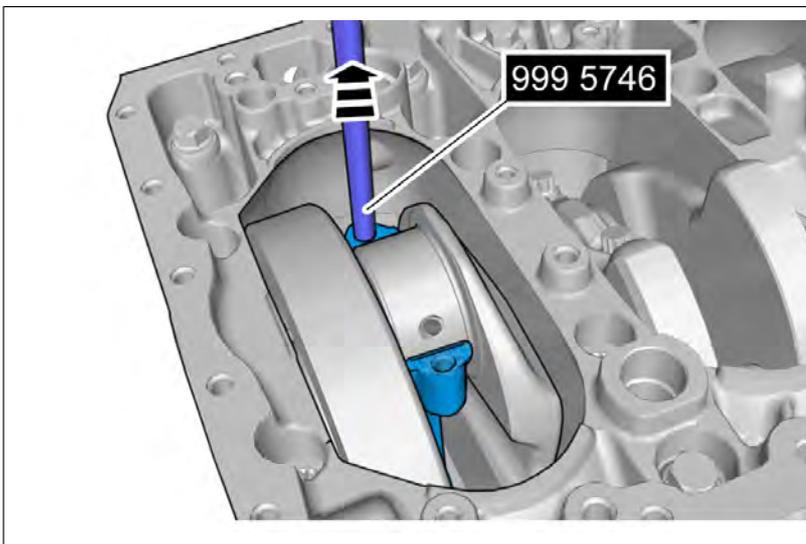

Caution! Take extra care when handling the components.

Special Tool: T9995746, Holder (remov.piston/ connecting rod) B 200-B 6304

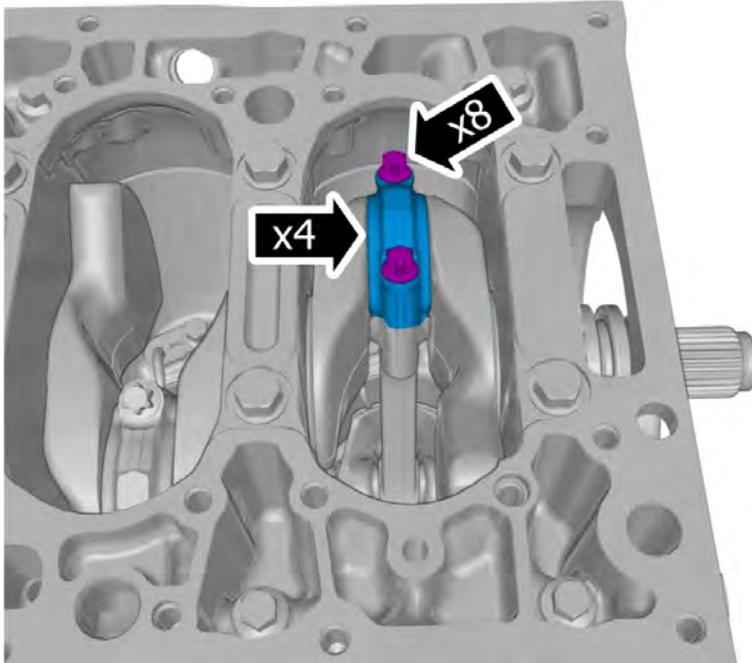

Warning! Make sure that new bolts are installed.

Caution! Take extra care when handling the components.

Install the marked component.
Tighten the bolts.

Torque:

- Stage 1 : Cap connecting rod , 15 Nm
- Stage 2 : Cap connecting rod , 25 Nm
- Stage 3 : Cap connecting rod , 90°

Install balance shaft unit , refer to:

- Removal, replacement and installation
- 2 - Engine with mountings and equipment
- 21 - Engine
- 215 - transmission

Install cylinder head , refer to:

- Removal, replacement and installation
- 2 - Engine with mountings and equipment
- 21 - Engine
- 211 - cylinder head